

# Compact Converter Operational Manual



---

979 Second Street SE, Suite 309  
Charlottesville, VA 22902-6172 (USA)  
Tel: 434.297.3257; Fax: 434.297.3258  
[www.vadiodes.com](http://www.vadiodes.com)

---

**Section 1 – CC General Overview, Safety and Operational Guidelines..... Pages 2-3**

Contents ..... Page 2  
CC General Overview, Safety and Operational Guidelines ..... Page 3

**Section 2 – Product Overview and Technical Specifications ..... Pages 4-7**

CC Configurations ..... Page 4  
Product Overview ..... Page 5  
Double-Sideband Up-Conversion and Down-Conversion..... Page 6  
Product Specifications (WR28 to WR10) ..... Page 7  
Product Specifications (WR8.0 and higher frequency) ..... Page 8

**Appendix 1 – CC Performance..... Pages 9-12**

CC Performance – WR28 and WR19 ..... Page 9  
CC Performance – WR15 and WR12..... Page 10  
CC Performance – WR10 and WR6.5 ..... Page 11  
CC Performance – WR5.1..... Page 12

**Addendum – Product Updates and Company Contacts ..... Page 13**

# CC General Overview, Safety and Operational Guidelines

## Compact Converters (CC)

Virginia Diodes offers compact converters (CCs) for frequency up and down-conversion. These converters are easy to use and well suited for high performance up and down conversion of wide band modulated millimeter-wave signals. VDI CCs offer full waveguide band coverage and are available from WR15 (50-75 GHz) to WR-5.1 (140-220 GHz) with additional CCs under development.



## Safety and Operational Guidelines



Read all instructions and information in this product manual before connecting the product to external equipment. Operational procedures must be followed for proper function. If you have questions, contact VDI before operating the product.

The internal components can be damaged by Electro Static Discharge (ESD). Any operator using or handling the device should wear a grounded wrist strap specifically designed to guard against ESD. The work environment including test benches should also be properly grounded.



VDI assumes the customer is familiar with microwave, millimeter wave and VDI products in general. The user and customer are expected to understand all safety guidelines, health hazards and general advisories that may exist and are associated with the use of this device. VDI is not responsible for any human hazards that may exist or may occur while using this device.

## Virginia Diodes, Inc. (VDI) accepts no liability for damage or injury resulting from or caused by:

- Improper use, disassembly or use for purposes other than those for which the product was designed;
- Use outside common safety, health or general advisories pertaining to microwave, millimeter wave and VDI products;
- Repairs carried out by persons other than VDI or its assigned agents.

## Waveguide Inspection / Test Port Care

- Inspect waveguide flanges for debris prior to making connections.
- Making a connection with debris between the waveguide flanges can damage the waveguide interface and prevent repeatable connections.
- If debris is present, clean the flange with pre-dampened lint free wipes or swabs (e.g. TexWipe TX1065). If these are not available, lint free cloths lightly dampened with ethanol may be used (e.g. TexWipe TX604).
- When device is not in use, cover appropriate waveguide flanges with provided dust cap or protective waveguide tape.
- Waveguide screws should be torqued between 20-50 cNm, greater values can damage the interface.
- Use a torque of 90 cNm when making coaxial connections. Avoid sharp bends in cables.


## General Operating Practices and Recommendations

- Check with VDI before any use is attempted beyond those described in this manual, including uses that may exceed limitations stated here or commonly accepted standards of practice.

## Compact Converter Configurations


### Compact Up-Converter (CCU):

A CCU module is a compact converter module configured for up-conversion. Basic block diagram is shown below.

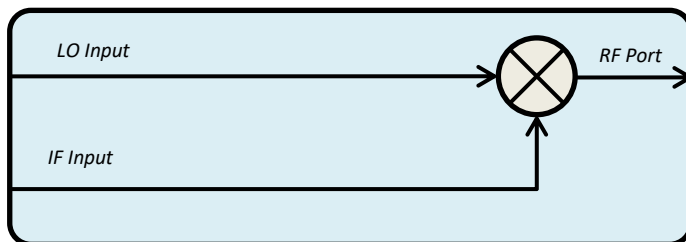

### Compact Down-Converter (CCD):


A CCD module is a compact converter module configured for down-conversion. Basic block diagram is shown below.

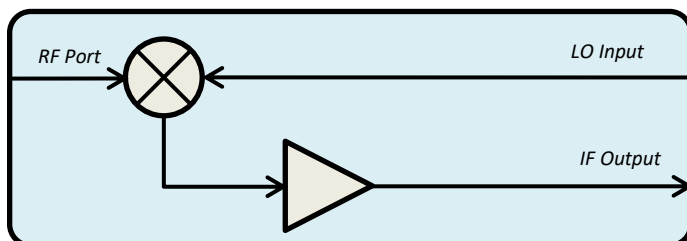

# Product Overview

## Compact Converters

CCUs and CCDs have a rectangular waveguide RF port and a coaxial LO and IF port. The drawing for a typical compact converter is shown below.

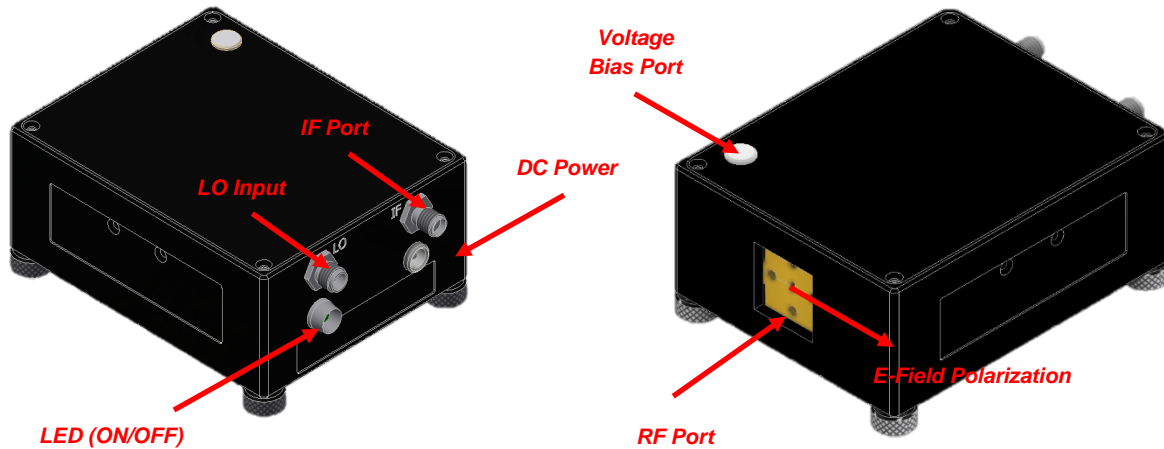

**LO Input:** For optimal performance, the user must adjust LO power at each frequency for optimal performance. DO NOT exceed damage limits listed on Page 7.

**IF Port (ESD Sensitive for CCUs only):** The IF port can be used as an input or an output depending on the configuration (see Page 4). The IF port for CCUs is extremely ESD sensitive. The IF port for CCDs has ESD protection. DO NOT apply any DC biases or surges when connecting / disconnecting from IF port. Discharge static from cables before connecting to the device. DO NOT exceed damage limits listed on Page 7. Replace IF port with provided 50Ω termination when IF port is not in use.

**RF Port:** The RF port can be used as an input or an output depending on the configuration (see Page 4). DO NOT exceed damage limits listed on Page 7.

**Voltage Bias Port:** The voltage bias port provides +9V that is used to bias external VDI RF amplifiers.

Failure to follow these procedures may damage or destroy the device. The user is liable for repair costs of detectors damaged by ESD, and the use of stringent ESD precautions is recommended when making connections to VDI compact converters.

## General Operating Procedure

### Turn On:

With the input power turned off, make all necessary connections (i.e. LO cable, IF cable).  
Connect VDI RF amplifier to Voltage Bias Port of CCU/CCD (if applicable).  
Connect power supply to DC Power port on CCU/CCD.  
Apply appropriate LO power to the device then apply small signal input power.

### Turn Off:

Turn off small signal input power then turn off LO input power.  
Disconnect power supply from DC Power port on CCD/CCD.  
Disconnect and turn off all other equipment on user test bench.

# Double Side-Band Up-Conversion and Down-Conversion

## CCD: Block Down-Conversion

VDI CCDs can be used to down-convert a block of millimeter-wave / THz signals to the IF band, where it can then be coupled into the RF port of an analyzer or processed by other means. Figure 1 shows how a VDI CCD down-converts a block of millimeter-wave signals. It is important to note that due to the double sideband nature of the CCDs, the mixer will convert both sidebands. The upper and lower sidebands will be down-converted to the same range IF output frequencies.

The IF Output frequency can be calculated by:  $f_{IF} = |f_{RF} - N \cdot f_{LO}|$ , N is the harmonic factor for the module. N=2 is shown in the figure below.

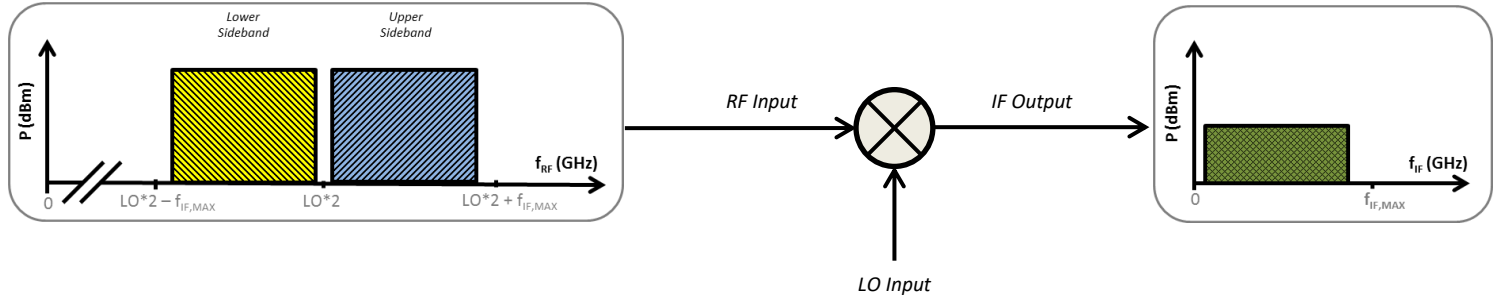


Figure 1: Diagram of double-sideband block down-conversion is shown for subharmonic mixing.

## CCU: Block Up-Conversion

The CCUs can also be used to up-convert a block of IF signals to generate a block of millimeter-wave / THz signals for transmission from the RF port. Figure 2 shows how a VDI CCU up-converts a block of IF input signals. Due to the double sideband nature of the CCUs, two sidebands (upper and lower sidebands) are generated during the up-conversion process. A filter may be preferred for certain applications to eliminate one sideband. VDI offers a range of filters for common wireless communication bands. Custom filters are also available upon request.

The lower sideband RF Output frequency can be calculated by:  $f_{RF-lower} = N \cdot f_{LO} - f_{IF}$ . The upper sideband RF Output frequency can be calculated by:  $f_{RF-upper} = N \cdot f_{LO} + f_{IF}$ , where N is the harmonic factor for the module. N=2 is shown in the figure below.

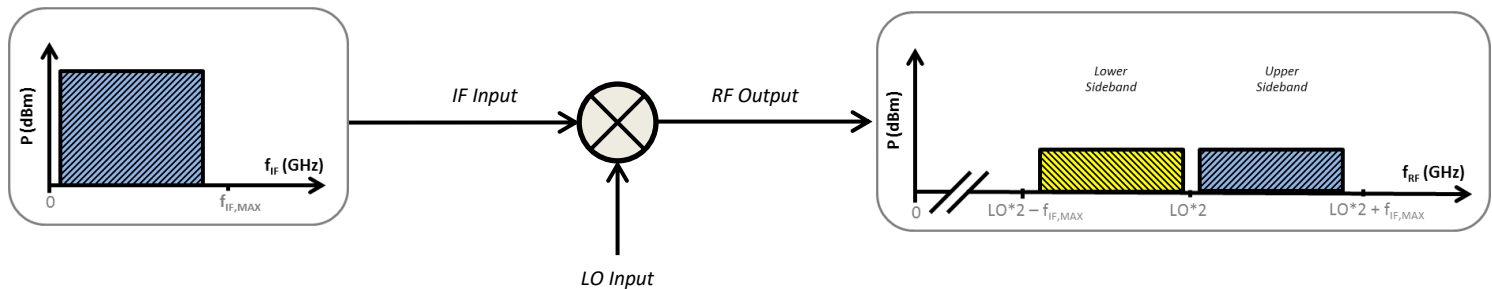


Figure 2: Diagram of double side-band block up-conversion is shown for subharmonic mixing.

# Product Specifications (WR28 to WR12)

## Product Specifications for Compact Up-Converters (CCU)

	WR28CCU	WR19CCU	WR15CCU	WR12CCU
LO Input Frequency (GHz)	22.5-40	20-30	25-37.5	30-45
P <sub>LO</sub> , LO Input Power (dBm, typical / damage)*	0 / 10	0-3 / 6	0-6 / 9	0-6 / 9
IF Input Frequency (GHz)	0.01-8.5	0.01-6	0.01-9	0.01-12
P <sub>IF</sub> , IF Input Power (dBm, ~P1dB / ~P0.1dB)	8 / -5	-4 / -14	P <sub>LO</sub> - 10dB / P <sub>LO</sub> - 20dB	
P <sub>IF</sub> , IF Input Power (dBm, damage)	10	6	0	
RF Output Frequency (GHz)	22.5-40	40-60	50-75	60-90
RF Output Flange	WR-28 UG-599/U-M	WR19 UG-599/U-M	WR15 UG-387/U-M	WR12 UG-387/U-M
LO Input Connector	2.92mm(f)	2.92mm(f)	2.92mm(f)	2.4mm(f)
IF Input Connector	2.92mm(f)			
Conversion Loss (typ., dB)++	10	10	10	10
Operating Temperature (Typical / Recommended)	25°C / 20-30°C			
Typical Dimensions (in., without feet)	3.75 x 3.00 x 1.50			

## Product Specifications for Compact Down-Converters (CCD)

	WR28CCD	WR19CCD	WR15CCD	WR12CCD
LO Input Frequency (GHz)	22.5-40	20-30	25-37.5	30-45
P <sub>LO</sub> , LO Input Power (dBm, typical / damage)*	0 / 10	0-3 / 6	0-6 / 9	0-6 / 9
IF Output Frequency (GHz)	0.0001-8.5	0.0001-6	0.0001-9	0.0001-12
P <sub>RF</sub> , RF Input Power (dBm, ~P1dB / ~P0.1dB)	8 / -5	-4 / -14	P <sub>LO</sub> - 10dB / P <sub>LO</sub> - 20dB	
P <sub>RF</sub> , RF Input Power (dBm, damage)	10	6	0	
IF Amplifier Gain (dB)†	~12			
RF Input Frequency (GHz)	22.5-40	40-60	50-75	60-90
RF Input Flange	WR-28 UG-599/U-M	WR19 UG-599/U-M	WR15 UG-387/U-M	WR12 UG-387/U-M
LO Input Connector	2.92mm(f)	2.92mm(f)	2.92mm(f)	2.4mm(f)
IF Output Connector	2.92mm(f)			
Conversion Loss (typ., dB)++	10	10	10	10
Operating Temperature (Typical / Recommended)	25°C / 20-30°C			
Typical Dimensions (in., without feet)	3.75 x 3.00 x 1.50			

\*LO Input Power for optimal conversion loss varies with LO input frequency

†CCD modules include an IF amplifier with ~12dB gain.

++Conversion Loss is defined as the intrinsic mixer conversion loss without any external amplifiers.

### General Notes:

- VDI CCs include a single-volt power supply.
- The required LO power for optimal performance varies across the frequency band. Performance specifications assume optimal RF and LO power coupled into the mixer; performance may be reduced near band edges.
- Conversion Loss performance is specified at ~1 GHz IF. Conversion loss increases as a function of IF, at a rate of ~1.5dB/10GHz, up to the specified Maximum IF Frequency. Performance is typical with reduced performance at band edges.
- RF filters can be used to eliminate one sideband of the CCU RF output. Contact VDI for more information.
- RF amplifiers can be used to increase the CCU RF output power. Contact VDI for more information.
- Where available, an input isolator will smooth the required LO input power vs. frequency.

# Product Specifications (WR10 and higher frequency)

## Product Specifications for Compact Up-Converters (CCU)

	WR10CCU	WR6.5CCU	WR6.5CCU-M12	WR5.1CCU
LO Input Frequency (GHz)	37.5-55	18.3-28.3	9.2-14.2	23.3-36.7
$P_{LO}$ , LO Input Power (dBm, typical / damage)	6-12 / 15*	0-6 / 12	0-6 / 12	0-6 / 12
IF Input Frequency (GHz)	0.01-15	0.01-17	0.01-17	0.01-22
$P_{IF}$ , IF Input Power (dBm, ~P1dB / ~P0.1dB)	$P_{LO} - 10\text{dB} / P_{LO} - 20\text{dB}$		-1 / -11	
$P_{IF}$ , IF Input Power (dBm, damage)	0	6		
RF Output Frequency (GHz)	75-110	110-170	110-170	140-220
RF Output Flange	WR-10 UG-387/U-M	WR6.5 UG-387/U-M	WR6.5 UG-387/U-M	WR5.1 UG-387/U-M
LO Input Connector	1.85mm(f)	2.92mm(f)	2.92mm(f)	2.92mm(f)
IF Input Connector	2.92mm(f)			
Conversion Loss (typ., dB)††	10	10	10	12
Operating Temperature (Typical / Recommended)	25°C / 20-30°C			
Typical Dimensions (in., without feet)	3.75 x 3.00 x 1.50		5.00 x 3.50 x 1.50	

## Product Specifications for Compact Down-Converters (CCD)

	WR10CCD	WR6.5CCD	WR6.5CCD-M12	WR5.1CCD
LO Input Frequency (GHz)	37.5-55	18.3-28.3	9.2-14.2	23.3-36.7
$P_{LO}$ , LO Input Power (dBm, typical / damage)	6-12 / 15*	0-6 / 12	0-6 / 12	0-6 / 12
IF Output Frequency (GHz)	0.0001-15	0.0001-17	0.0001-17	0.0001-22
$P_{RF}$ , RF Input Power (dBm, ~P1dB / ~P0.1dB)	$P_{LO} - 10\text{dB} / P_{LO} - 20\text{dB}$		-1 / -11	
$P_{RF}$ , RF Input Power (dBm, damage)	0	6		
IF Amplifier Gain (dB)†	~12			
RF Input Frequency (GHz)	75-110	110-170	110-170	140-220
RF Input Flange	WR-10 UG-387/U-M	WR6.5 UG-387/U-M	WR6.5 UG-387/U-M	WR5.1 UG-387/U-M
LO Input Connector	1.85mm(f)	2.92mm(f)	2.92mm(f)	2.92mm(f)
IF Output Connector	2.92mm(f)			
Conversion Loss (typ., dB)††	10	10	10	12
Operating Temperature (Typical / Recommended)	25°C / 20-30°C			
Typical Dimensions (in., without feet)	3.75 x 3.00 x 1.50		5.00 x 3.50 x 1.50	

\*LO Input Power for optimal conversion loss varies with LO input frequency

†CCD modules include an IF amplifier with ~12dB gain.

††Conversion Loss is defined as the intrinsic mixer conversion loss without any external amplifiers.



### General Notes:

- VDI CCs include a single-volt power supply.
- The required LO power for optimal performance varies across the frequency band. Performance specifications assume optimal RF and LO power coupled into the mixer; performance may be reduced near band edges.
- Conversion Loss performance is specified at ~1 GHz IF. Conversion loss increases as a function of IF, at a rate of ~1.5dB/10GHz, up to the specified Maximum IF Frequency. Performance is typical with reduced performance at band edges.
- RF filters can be used to eliminate one sideband of the CCU RF output. Contact VDI for more information.
- RF amplifiers can be used to increase the CCU RF output power. Contact VDI for more information.
- Where available, an input isolator will smooth the required LO input power vs. frequency.





## CCU/CCD Single Side Band (SSB) Conversion Loss Performance

Typical CCU/CCD SSB intrinsic mixer conversion loss data is provided below. Data below does not include any internal or external amplification and is tested at ~400 MHz IF. Measured conversion loss will be shipped with each VDI CC.

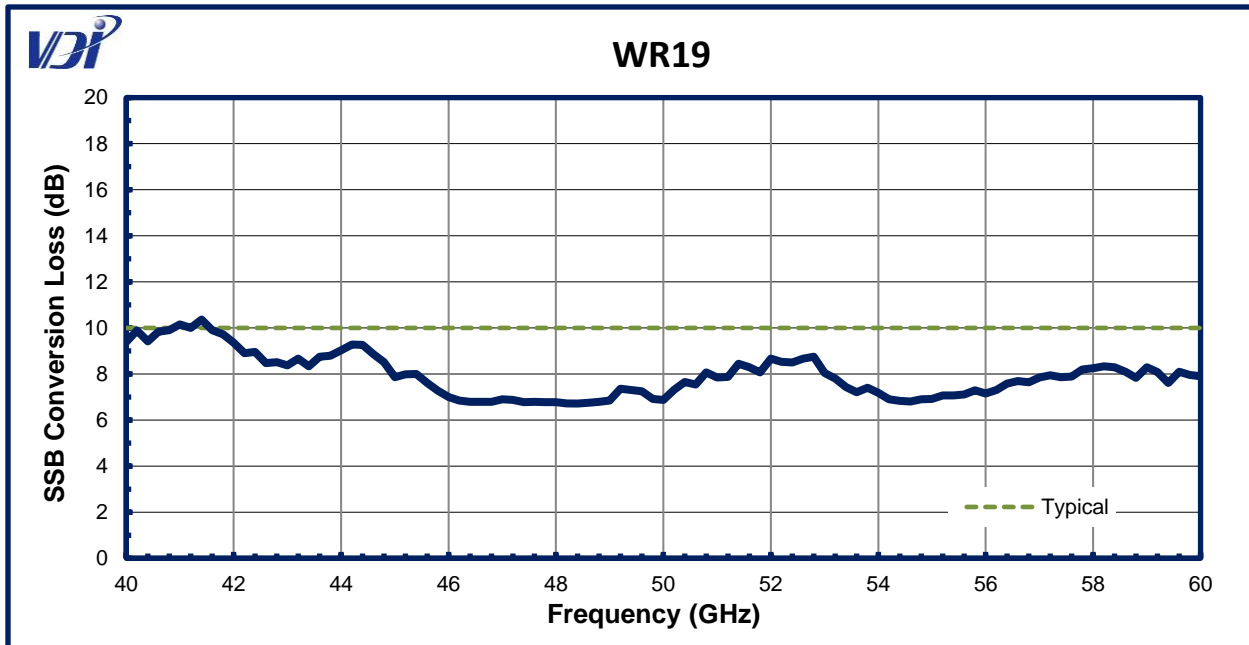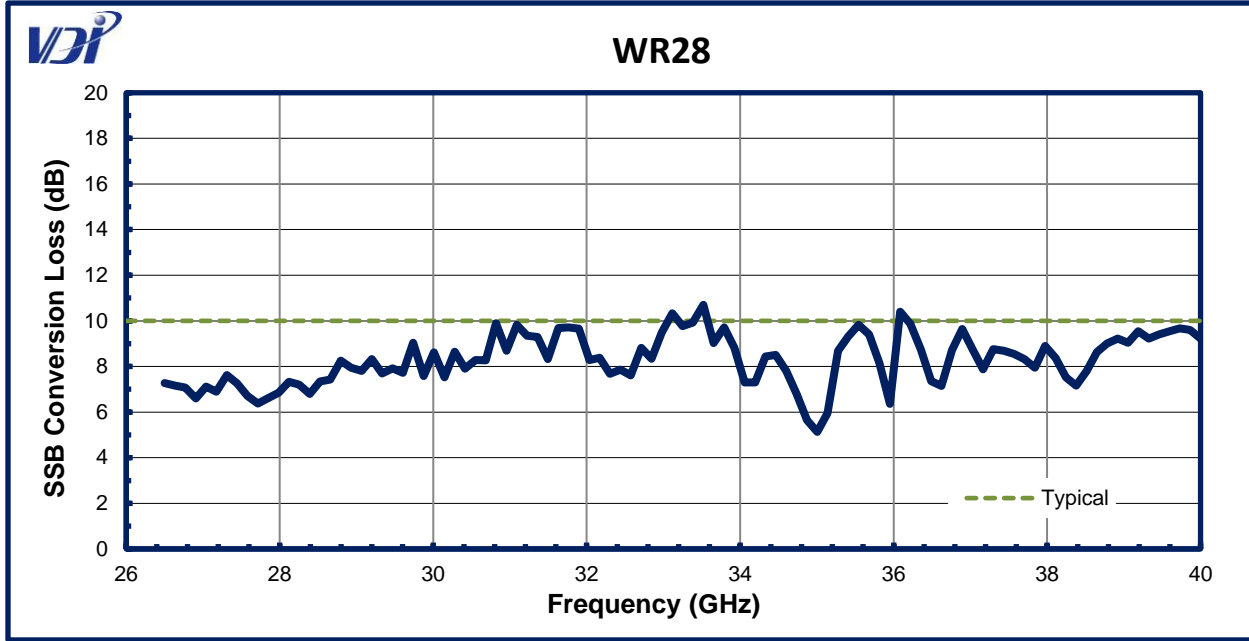



# CC Performance – WR15 and WR12

## CCU/CCD Single Side Band (SSB) Conversion Loss Performance - continued

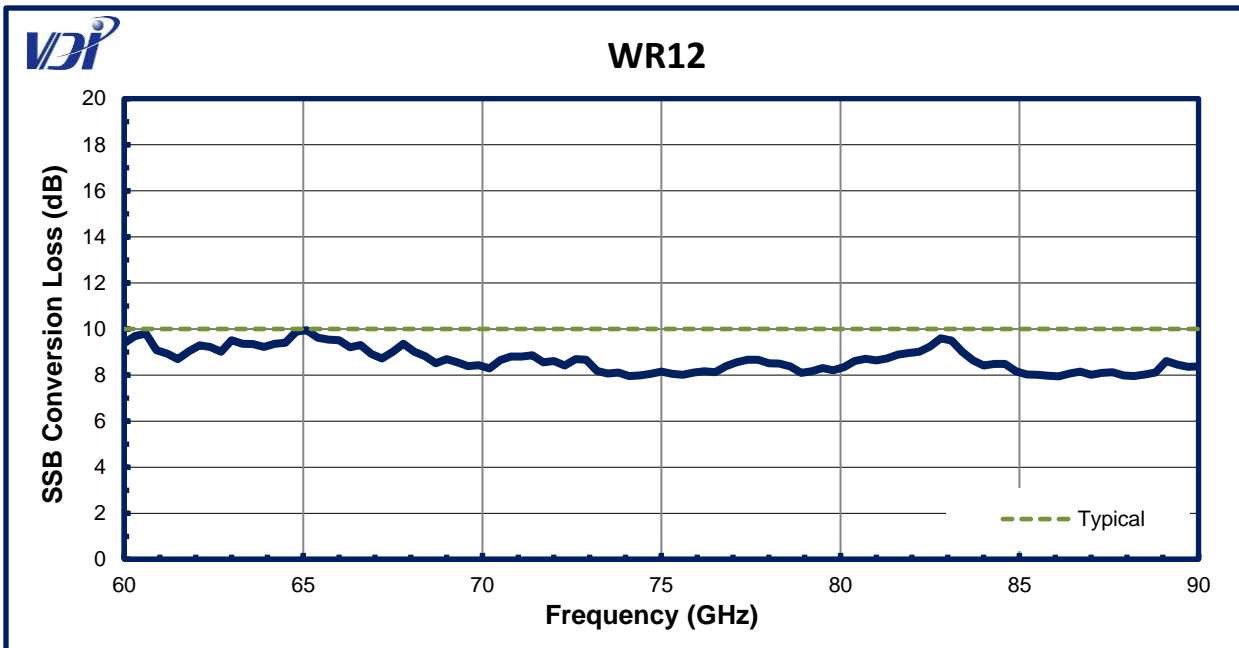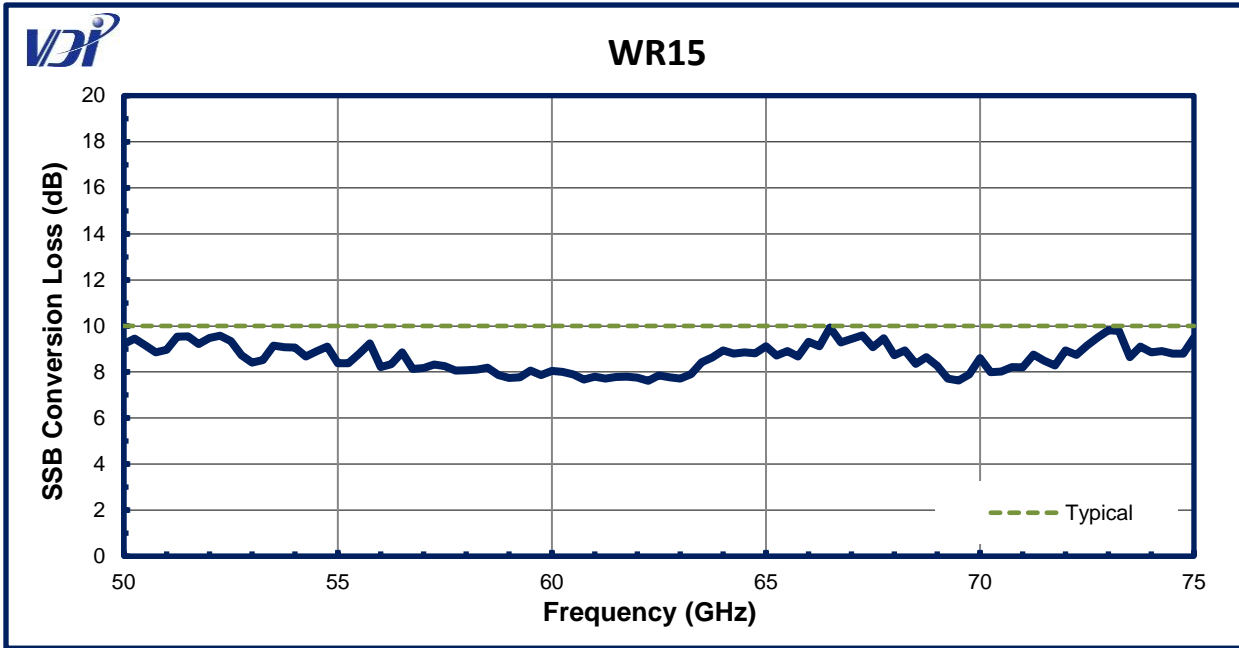


# CC Performance – WR10 and WR6.5

## CCU/CCD Single Side Band (SSB) Conversion Loss Performance - continued

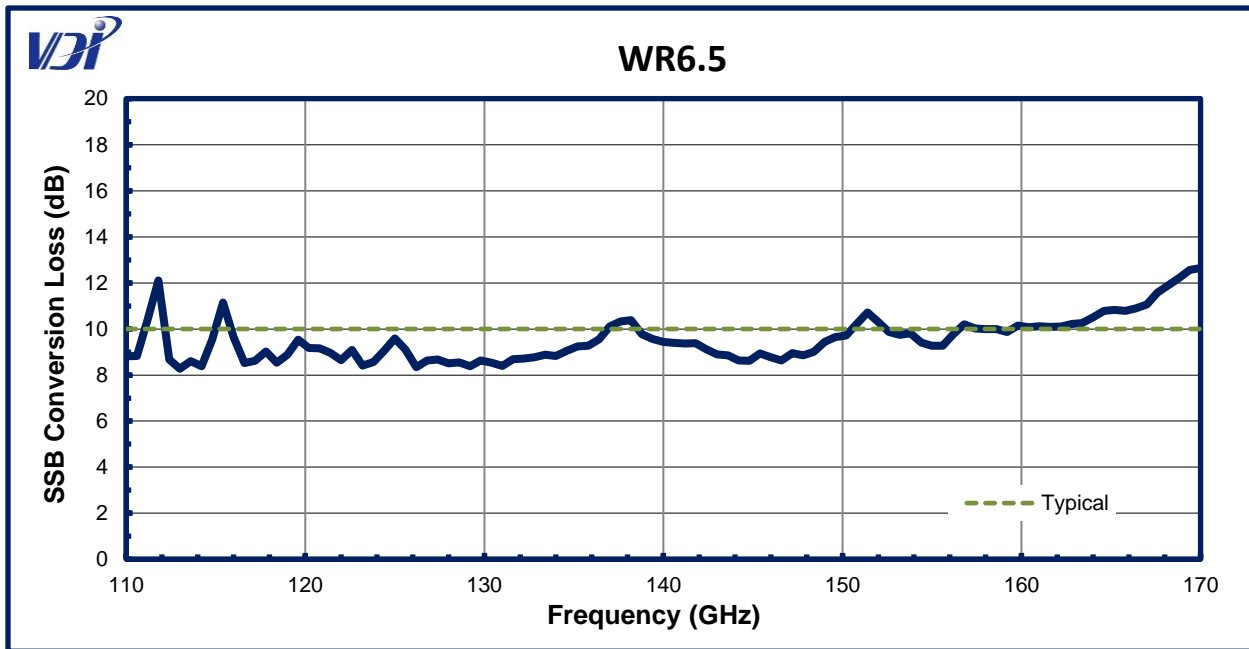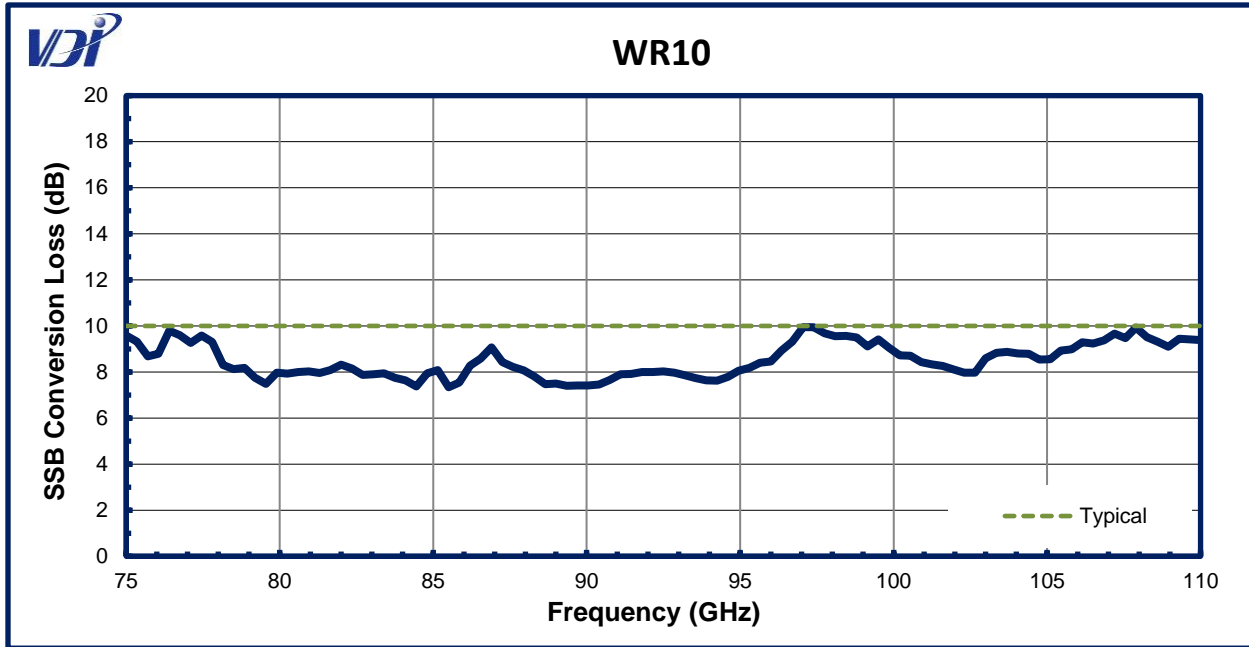

# CC Performance – WR5.1

## CCU/CCD Single Side Band (SSB) Conversion Loss Performance - continued

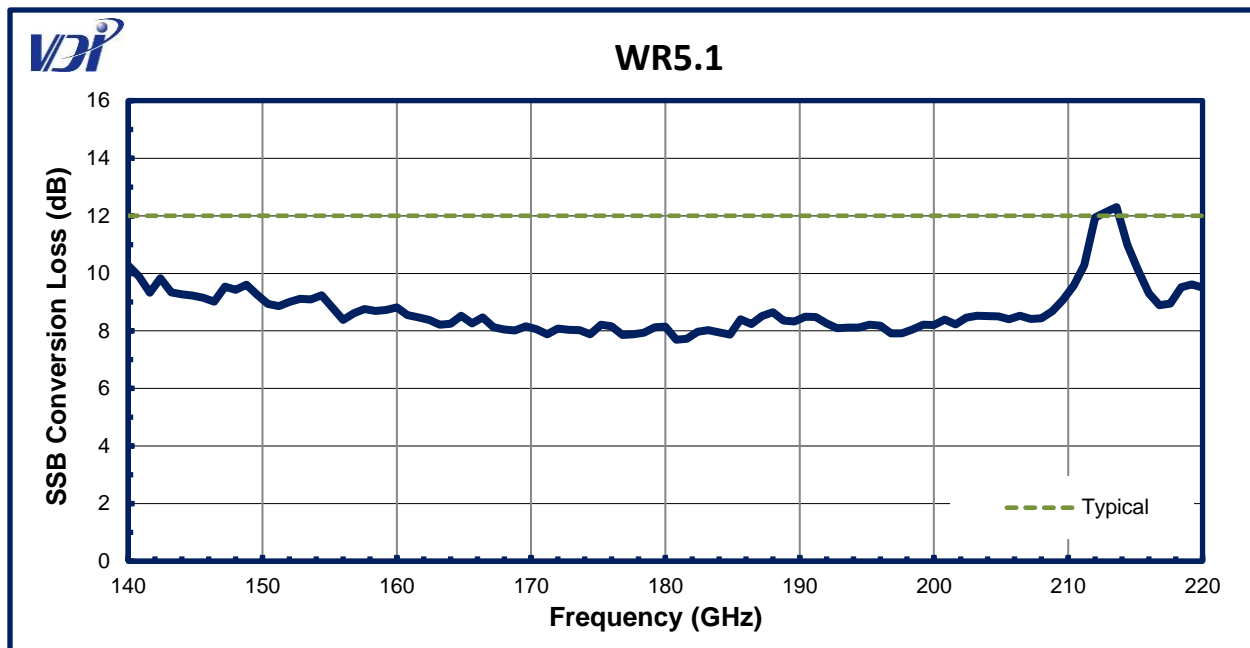

# Addendum — Product Updates and Company Contacts

The Virginia Diodes staff of engineering and physical science professionals works to continually improve our products. We also depend upon feedback from colleagues and customers. Ideas to simplify component operations, improve performance or add capabilities are always welcome.

## Contact VDI:

### Virginia Diodes, Inc.

Web: <http://www.vadiodes.com>

Email: [Technical@vadiodes.com](mailto:Technical@vadiodes.com)

Telephone: 434.297.3257

# Compact Converter Manual Addendum – WR2.2

WR2.2CCU Specifications	
LO Input Frequency (GHz)	27.50-41.67
P <sub>LO</sub> , LO Input Power (dBm, typical / damage)	0-6 / 9
IF Input Frequency (GHz)	0.01-40
P <sub>IF</sub> , IF Input Power (dBm, ~P1dB / ~P0.1dB)	-7 / -17
P <sub>IF</sub> , IF Input Power (dBm, damage)	0
RF Output Frequency (GHz)	330-500
RF Output Flange	WR-2.2 UG-387/U-M
LO Input Connector	2.92mm(f)
IF Input Connector	2.92mm(f)
SSB Conversion Loss (typ., dB) <sup>†</sup>	16
Operating Temperature (Typical / Recommended)	25°C / 20-30°C
Typical Dimensions (in., without footplate)	5.00 x 3.50 x 1.50

<sup>†</sup>Conversion Loss is defined as the intrinsic mixer conversion loss without any external amplifiers.

WR2.2CCD Specifications	
LO Input Frequency (GHz)	27.50-41.67
P <sub>LO</sub> , LO Input Power (dBm, typical / damage)	0-6 / 9
IF Output Frequency (GHz)	0.0001-40
P <sub>RF</sub> , RF Input Power (dBm, ~P1dB / ~P0.1dB)	-7 / -17
P <sub>RF</sub> , RF Input Power (dBm, damage)	0
IF Amplifier Gain (dB) <sup>†</sup>	~12
RF Input Frequency (GHz)	330-500
RF Input Flange	WR-2.2 UG-387/U-M
LO Input Connector	2.92mm(f)
IF Output Connector	2.92mm(f)
SSB Conversion Loss (typ., dB) <sup>††</sup>	16
Operating Temperature (Typical / Recommended)	25°C / 20-30°C
Typical Dimensions (in., without footplate)	5.00 x 3.50 x 1.50

<sup>†</sup>CCD modules include an IF amplifier with ~12dB gain.

<sup>††</sup>Conversion Loss is defined as the intrinsic mixer conversion loss without any external amplifiers.

## General Notes:

- VDI CCs include a single-volt power supply.
- Conversion Loss performance is specified at ~1 GHz IF. Conversion loss increases as a function of IF, at a rate of ~1.5dB/10GHz, up to the specified Maximum IF Frequency. Performance is typical with reduced performance at band edges.
- RF filters can be used to eliminate one sideband of the CCU RF output. Contact VDI for more information.
- RF amplifiers can be used to increase the CCU RF output power. Contact VDI for more information.
- Where available, an input isolator will smooth the required LO input power vs. frequency.